
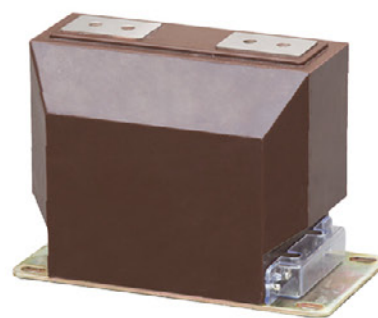


LZZBJ9-10C1

型号含义 /Meaning of model

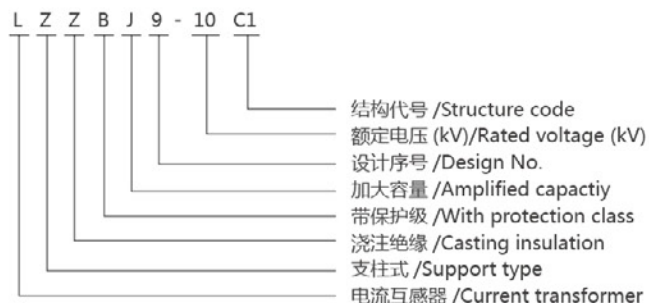

技术参数 /Technical data

- 额定绝缘水平：12/42/75kV；
 - 负荷的功率因数： $\text{COS}\Phi=0.8$ (滞后)；
 - 额定二次电流：5A 或 1A；
 - 额定频率：50 或 60Hz；
 - 污秽等级：II 级；
 - 环境温度：最低温度 -5°C ，最高温度 40°C ，日均温度不超过 30°C ；
 - 海拔高度： ≤ 1500 米；
 - 产品标准：GB20840.1 GB20840.2。
- Rated insulation level: 12/42/75kV.
 - Power factor of load: $\text{COS}\Phi=0.8$ (lagging).
 - Rated secondary current: 5A or 1A.
 - Rated frequency: 50 or 60Hz.
 - Anti-Pollution grade: Class II.
 - Ambient temperature: -5°C - 40°C , daily average temperature not more than 30°C .
 - Altitude: $\leq 1500\text{m}$.
 - Standard: GB20840.1 GB20840.2.

技术参数表 /Technical data form

产品型号 Type	额定电流 (A) Rated current	准确级组合 Accuracy class combination	额定输出 (VA) rated output			额定短时热电流 (kA) Rated short-time thermal current	额定动稳定电流 (kA) Rated dynamic current
			0.2S	0.5	10P		
LZZBJ9-10C1	5-200	0.5/10P	10	10	15	90In	225In
	300	0.5/10P/10P				21	52.5
	400	0.2S/0.5					
	500	0.2S/10P					
	600	0.2S/0.5/10P				32	80
	800	0.2S/10P/10P					
	1000					50	125

注：用户如有特殊要求可与我公司协商确定。 Note: any special requirements can be negotiated with us.

外形及安装尺寸 Overall dimension drawing

